



A
FRONT VIEW

B
FRONT VIEW

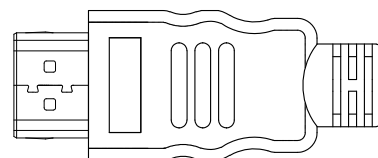

BACK VIEW

A	B	WIRING	A	B	WIRING
HDMI 19M	HDMI 19M		HDMI 19M	HDMI 19M	
1	1	WHITE	19	19	WHITE
3	3	RED	14	14	YELLOW
5	5	DRAIN	17	17	DRAIN
4	4	WHITE	15	15	YELLOW
6	6	BLUE	16	16	ORANGE
2	2	DRAIN	13	13	WHITE
7	7	WHITE	18	18	RED
9	9	GREEN	S	S	SHELL
11	11	DRAIN			
10	10	WHITE			
12	12	BROWN			
8	8	DRAIN			

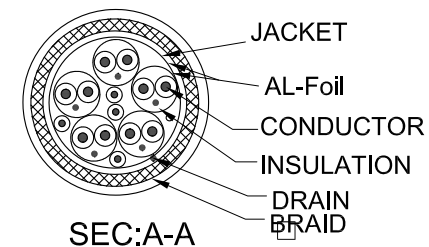

ELECTRICAL TEST:

- 100% OPEN&SHORT TEST
- CONTACT RESISTANCE:"X" ohm(MAX)
- INSULATION RESISTANCE:5 MOhm (MIN)
- HI-POT TEST:AC&DC:250V

P/N	LENGTH(mm)	TOLERANCE	CONTACT RESISTANCE
	1000	±20mm	1 Ohm
	1500	±20mm	2 Ohm
	2000	±30mm	2 Ohm

NO.	SPECIFICATION	Q'TY
7	HDMI CAP:HDMI CAP TRANSPARENT	
6	OUTER MODEL:PVC MOLDING ,50P COLOR:BLACK	
5	INNER MODEL:LD-PE COLOR:TRANSPARENT	
4	SHELL CONTRUCTION TYPE:WITH RIB AND THE PROTRUDING EYES AND THE SIDE SPRING.	
3	CONNECTOR:HDMI 19 PIN MALE CONNECTOR, CONTACT GOLD PLATED , IRON SHELL GOLD PLATED ,INSULATOR COLOR:RED	
2	CABLE:HDMI CABLE 2.0V,[1P*30#(1/0.25BC)+D+AL]*5C+4C*30#(1/0.25BC)+ADB, PVC JACKET, COLOR:BLACK OD:7.3±0.2MM	
1	MARKIGN:	
BOM LIST		

ITEM NO:	HDMI 19M to HDMI			DRAWER DATE	LY 20180301
TITLE	HDMI 2.0V CABLE			CHECKED DATE	MTC 20180301
CUSTOMER				APPROVED DATE	
MATERIAL	SCALE				
REV.	A	UNIT	MM		
DRAWING NO:	80301124				
ACAD FILE					