


Pin Assignment

P1	Color	P2
1	White	1 TMDS data2-
3	Red	3 TMDS data2+
	Drain	2 TMDS data2 Shield
2	White	4 TMDS data1-
4	Green	6 TMDS data1+
6	Drain	5 TMDS data1 Shield
5	White	7 TMDS data0-
7	Blue	9 TMDS data0+
9	Drain	8 TMDS data0 Shield
8	White	10 TMDS Clock-
10	Brown	12 TMDS Clock+
12	Drain	11 TMDS Clock Shield
11	White	13 CEC
13	White	14 HPD/HEAC-
14	Black	19 Utility/HEAC +
19	Drain	17 DDC/CEC/HEAC GND
17	Orange	15 SCL
15	Yellow	16 SDA
16	Red	18 +5V Power
18	Drain	SHELL
SHELL		SHELL

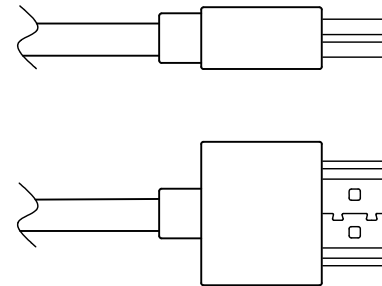

NOTES:

- 1.100% OPEN,SHORT & MISWIRE TESE
- 2.CONDUCTIVE RESISTANCE:TABLE A/MAX
- 3.INSULATION RESISTANCE:10MΩ/MIN.AT DC300V/10ms

COLOUR	LENGTH(mm)	TOLERANCE
/	1000	±30mm
/	1500	±30mm
/	2000	±30mm
/	3000	±40mm

NO.	SPECIFICATION	Q'TY
4	OUTER MOLDED: PVC 45Pa Black UL94V-0	
3	INNER MOLDED: PE Low density	
2	CONN :HDMI type A/M PIN:G/F SHELL:G/F Insulator:Black	
1	WIRE :{30AWG(bc)*1P+1C+AL}*5C+30AWG(bc)*4C+ADB OD:4.2mm PVC Jack Black	
BOM LIST		

ITEM NO:	Slim HDMI Cable 2.0V			DRAWER DATE	FW
TITLE				CHECKED DATE	ACE
CUSTOMER				APPROVED DATE	20221014
MATERIAL		SCALE			
REV.	A	UNIT	MM		
DRAWING NO:	21014095			 Dataprodukter utöver det vanliga	
ACAD FILE	E:\				