



| MARK | DATE | ECON NO. | DESCRIPTION | REV. | DESIGN |
|------|------|----------|-------------|------|--------|
| △1 | | | | | |

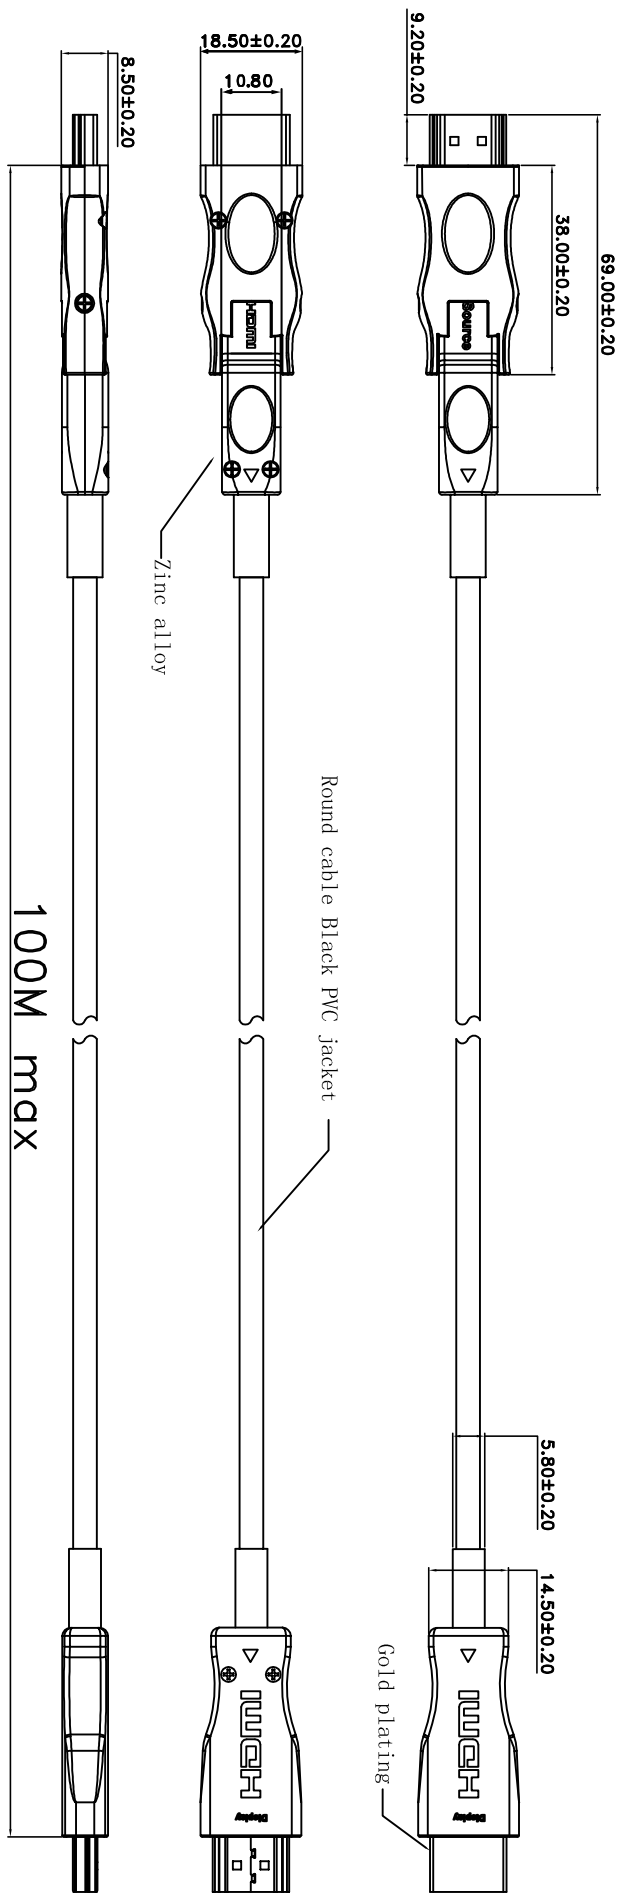

NOTE:

- Supports computer resolutions to 4K@60Hz@4:4:4
- Plug and Play
- Compatible with HDMI 2.0 standard.
- Support HDCP2.2@ARC
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max tension force: 100N
- Powered via HDMI devices
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

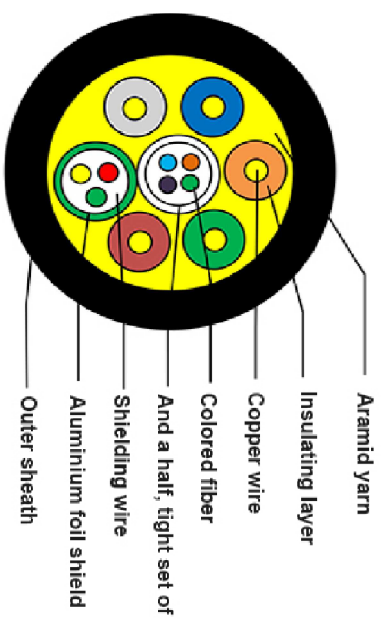

| UNLESS OTHERWISE SPECIFIED TOLERANCE | | | |
|--------------------------------------|-------|------|-------|
| ANG | TOL | DIM | TOL |
| .X | ±3.0° | .X | ±0.10 |
| .XX | ±2.0° | .XX | ±0.05 |
| .XXX | ±1.0° | .XXX | ±0.03 |

| | | | |
|-----|------------|------------------------|-----|
| f | | j | |
| CLH | 日期 | HDMI 2.0 AM-DM-AW(AOC) | |
| | 2019.03.13 | 125-0397 - 125-412 | |
| | | 单位 | 比例 |
| | | mm | 1:1 |
| | | 页码 | 1/1 |
| | | 版本 | 1 |